



TIANJIN WENJIANG
TECHNOLOGY CO., LTD.



Telephone/whatsapp: +8618829039048
Email: salesmarket@c-clevers.com

产品介绍

PRODUCT INTRODUCTION


XQJ托盘式电缆桥架 XQJ Tray-type support

托盘式桥架是石油、化工、电力、电视电讯等方面最广泛运用的理想敷设装置。它具有重量轻、载荷大、造型美观、结构简单、安装方便、散热透气性好等优点，既适用于动力电缆的安装，也适用于控制电缆的敷设。
Tray-type cable support systems are ideal cable laying devices most broadly applied in petroleum industry, chemical industry, power and light industries, television and telecommunication. It is featured by such advantages as small weight, great loading capacity, good-looking shape, simple structure, convenient erection, quick heat dissipation and fine permeability.


XQJ-P-01托盘直通
XQJ-P-01 Tray type straight support



XQJ-P-02水平弯通
XQJ-P-02 Tray type horizontal bend

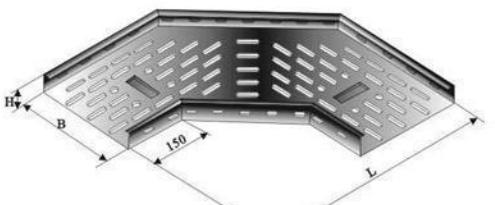

XQJ-P-03水平三通
XQJ-P-03 Tray type horizontal Tee

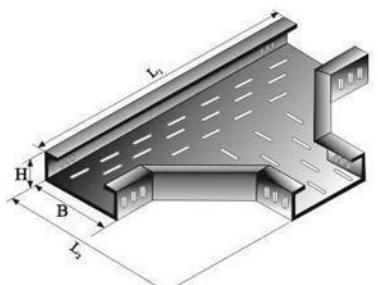

型号Model	b(mm)	h(mm)	重量(kg)Weight
P-01-6-2		60	12.61
P-01-10-2	200	100	15.58
P-01-15-2		150	19.32
P-01-20-2		200	31.19
P-01-6-3		60	22.44
P-01-10-3	300	100	26.53
P-01-15-3		150	31.60
P-01-20-3		200	36.66
P-01-6-4		60	34.19
P-01-10-4	400	100	39.29
P-01-15-4		150	45.60
P-01-20-4		200	51.92
P-01-6-5		60	40.53
P-01-10-5	500	100	45.60
P-01-15-5		150	51.92
P-01-20-5		200	58.26
P-01-6-6		60	46.85
P-01-10-6	600	100	51.92
P-01-15-6		150	58.26
P-01-20-6		200	64.60
P-01-6-8		60	71.71
P-01-10-8	800	100	77.77
P-01-15-8		150	85.35
P-01-20-8		200	92.94

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

型号Model	b(mm)	h (mm)	L(mm)	重量(kg)Weight
P-02-6-2		60	500	6.63
P-02-10-2	200	100		8.03
P-02-15-2		150		12.06
P-02-20-2		200		15.12
P-02-6-3		60		9.05
P-02-10-3	300	100		10.99
P-02-15-3		150		17.48
P-02-20-3		200		19.98
P-02-6-4		60		19.23
P-02-10-4	400	100		21.80
P-02-15-4		150		29.61
P-02-20-4		200		33.85
P-02-6-5		60		25.22
P-02-10-5	500	100		28.19
P-02-15-5		150		36.94
P-02-20-5		200		41.56
P-02-6-6		60		31.87
P-02-10-6	600	100		35.07
P-02-15-6		150		44.59
P-02-20-6		200		49.54
P-02-6-8		60		41.87
P-02-10-8	800	100		46.80
P-02-15-8		150		63.22
P-02-20-8		200		68.97


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

型号Model	b(mm)	h (mm)	L ₁ (mm)	L ₂ (mm)	重量(kg)Weight
P-03-6-2		60	800	500	10.02
P-03-10-2	200	100			14.10
P-03-15-2		150			21.24
P-03-20-2		200	1000		25.49
P-03-6-3		60	900		16.40
P-03-10-3	300	100			18.36
P-03-15-3		150	1100		26.39
P-03-20-3		200			30.79
P-03-6-4		60	1000		26.31
P-03-10-4	400	100			29.21
P-03-15-4		150	1200		41.75
P-03-20-4		200			47.71
P-03-6-5		60	1100		33.18
P-03-10-5	500	100			36.32
P-03-15-5		150	1300		48.46
P-03-20-5		200			54.52
P-03-6-6		60	1200		40.47
P-03-10-6	600	100			43.71
P-03-15-6		150	1400		59.40
P-03-20-6		200			66.00
P-03-6-8		60	1100		57.57
P-03-10-8	800	100			60.85
P-03-15-8		150	1600		70.00
P-03-20-8		200	1200		76.68


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ托盘式电缆桥架 XQJ Tray-type support


XQJ-P-04水平四通
XQJ-P-04 Tray type horizontal Cross

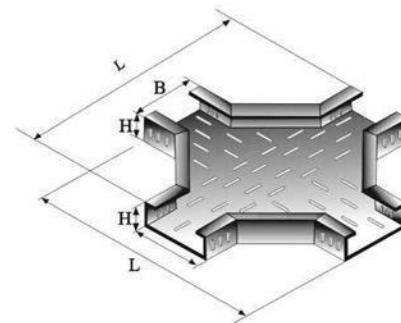

XQJ-P-05A、B垂直凹、凸弯通
XQJ-P-05A、B Tray type straight convex(convex)bend

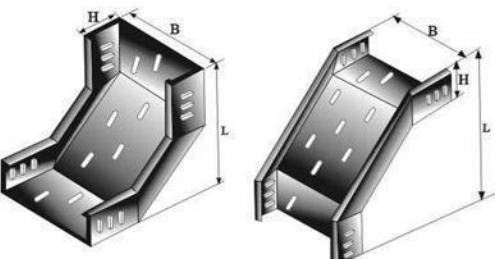

XQJ-P-05C 垂直转动弯通
XQJ-P-05C Tray type straight rotatable bend

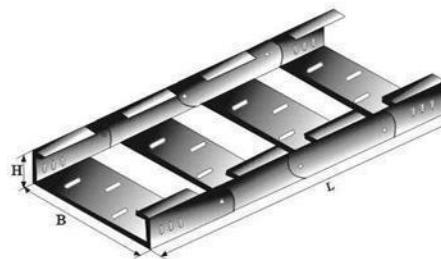

型号Model	b(mm)	h (mm)	L(mm)	重量(kg)Weight
P-04-6-2		60	800	12.86
P-04-10-2	200	100	860	17.55
P-04-15-2		150		27.72
P-04-20-2		200	1000	32.66
P-04-6-3		60		20.24
P-04-10-3	300	100	900	22.35
P-04-15-3		150	1100	32.51
P-04-20-3		200		37.93
P-04-6-4	400	60	1000	30.02
P-04-10-4		100		34.41
P-04-15-4		150	1200	50.46
P-04-20-4		200		57.67
P-04-6-5		60	1100	39.17
P-04-10-5	500	100	1200	42.47
P-04-15-5		150	1300	59.31
P-04-20-5		200		66.72
P-04-6-6	600	60	1200	47.21
P-04-10-6		100		50.53
P-04-15-6		150		69.03
P-04-20-6		200	1400	76.70
P-04-6-8	800	60		65.95
P-04-10-8		100		68.58
P-04-15-8		150		89.91
P-04-20-8		200	1600	98.08

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

型号Model	b(mm)	h (mm)	L(mm)	重量(kg)Weight
P-05A-B-6-2		60	360	5.19
P-05A-B-10-2	200	100	400	7.39
P-05A-B-15-2		150	550	13.32
P-05A-B-20-2		200	550	16.22
P-05A-B-6-3		60	360	7.25
P-05A-B-10-3	300	100	400	9.10
P-05A-B-15-3		150	550	15.10
P-05A-B-20-3		200	550	17.90
P-05A-B-6-4	400	60	360</	

产品介绍

PRODUCT INTRODUCTION

XQJ槽式电缆桥架


XQJ Channel-type Support

槽式电缆桥架是一种全封闭型电缆桥架，它是适用于敷设计算机、通信电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果。
The channel-type cable support system is fully enclosed cable support system. It is applicable for laying computer cables, communication cables, thermocouple cables and control cables of highly-sensitive systems. It works well in resisting interference of control cable shield and protecting the cables in seriously corrosive environment.


XQJ-C-1A槽式直通
XQJ-C-1AStraight-way trough-type



XQJ-C-2A水平弯通
XQJ-C-2A Horizontal Curved

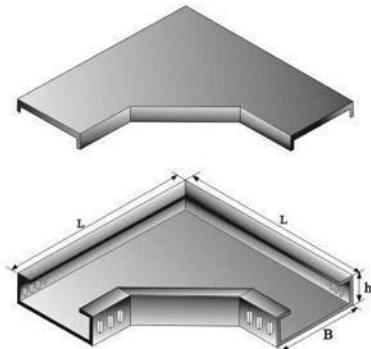

XQJ-C-3A水平三通
XQJ-C-3A Horizontal 3-Way

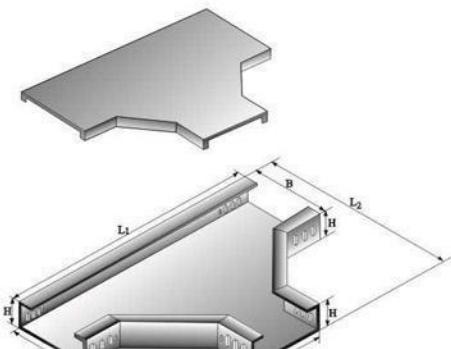

序号 NO.	型号 Model	规格 Size	重量 Weight
1	C-1A-1	50×25	6.71
2	C-1A-2	100×50	12.50
3	C-1A-3	150×75	18.27
4	C-1A-4	200×100	26.13
5	C-1A-5	250×125	40.61
6	C-1A-6	300×100	43.66
7	C-1A-7	300×150	48.73
8	C-1A-8	400×100	67.13
9	C-1A-9	400×150	73.45
10	C-1A-10	400×200	79.85
11	C-1A-11	500×100	79.66
12	C-1A-12	500×150	86.00
13	C-1A-13	500×200	92.32
14	C-1A-14	600×100	92.32
15	C-1A-15	600×150	99.47
16	C-1A-16	600×200	104.98
17	C-1A-17	800×100	156.47
18	C-1A-18	800×150	164.05
19	C-1A-19	800×200	171.63

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号 NO.	型号 Model	规格 Size	L (mm)	重量 Weight
1	C-2A-1	50×25	150	1.49
2	C-2A-2	100×50	300	3.23
3	C-2A-3	150×75	350	8.44
4	C-2A-4	200×100	450	11.48
5	C-2A-5	250×125	500	13.56
6	C-2A-6	300×100	650	22.56
7	C-2A-7	300×150	650	27.05
8	C-2A-8	400×100	800	31.17
9	C-2A-9	400×150	800	37.24
10	C-2A-10	400×200	900	41.61
11	C-2A-11	500×100	900	43.29
12	C-2A-12	500×150	900	47.18
13	C-2A-13	500×200	900	51.37
14	C-2A-14	600×100	1000	56.21
15	C-2A-15	600×150	1000	59.96
16	C-2A-16	600×200	1000	62.51
17	C-2A-17	800×100	1200	69.49
18	C-2A-18	800×150	1200	75.42
19	C-2A-19	800×200	1200	86.55

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号 NO.	型号 Model	规格 Size	(mm)	重量 Weight
			L ₁	L ₂
1	C-3A-1	50×25	250	150
2	C-3A-2	100×50	500	300
3	C-3A-3	150×75	550	350
4	C-3A-4	200×100	700	400
5	C-3A-5	250×125	750	500
6	C-3A-6	300×100	650	26.72
7	C-3A-7	300×150	1000	33.92
8	C-3A-8	400×100	800	39.12
9	C-3A-9	400×150	1200	48.96
10	C-3A-10	400×200	800	54.23
11	C-3A-11	500×100	1300	58.42
12	C-3A-12	500×150	900	61.15
13	C-3A-13	500×200	900	65.51
14	C-3A-14	600×100	1400	67.14
15	C-3A-15	600×150	1400	71.65
16	C-3A-16	600×200	1400	77.70
17	C-3A-17	800×100	1600	86.78
18	C-3A-18	800×150	1600	94.46
19	C-3A-19	800×200	1600	103.67

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架

XQJ Channel-type Support


XQJ-C-4A水平四通

XQJ-C-4AHorizontal 4-Way




XQJ-C-4B上垂直等径四通

XQJ-C-4BVertical equal sectional Tee

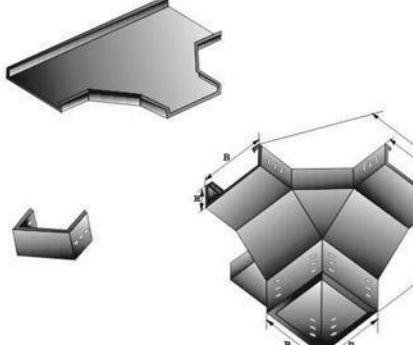

XQJ-C-06A、B、C、D型异径接头

XQJ-C-06A、B、C、DVmodel Reducer

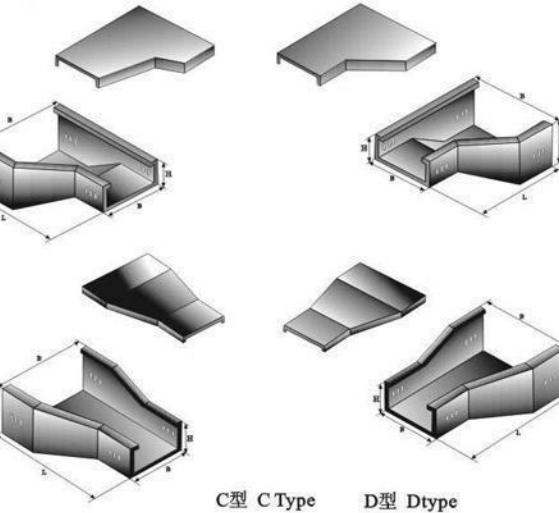

序号 NO.	型号 Model	规格 Size	L(mm)	重量 Weight
1	C-4A-1	50×25	250	2.84
2	C-4A-2	100×50	500	6.89
3	C-4A-3	150×75	550	17.06
4	C-4A-4	200×100	700	21.56
5	C-4A-5	250×125	750	24.81
6	C-4A-6	300×100	1000	34.42
7	C-4A-7	300×150	1200	43.24
8	C-4A-8	400×100	1300	48.23
9	C-4A-9	400×150	1400	60.45
10	C-4A-10	400×200	1400	67.49
11	C-4A-11	500×100	1300	69.79
12	C-4A-12	500×150	1300	73.97
13	C-4A-13	500×200	1400	79.89
14	C-4A-14	600×100	1400	80.82
15	C-4A-15	600×150	1400	81.69
16	C-4A-16	600×200	1400	93.72
17	C-4A-17	800×100	1600	97.26
18	C-4A-18	800×150	1600	108.15
19	C-4A-19	800×200	1600	114.28

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes


型号 Model	序号 NO.	规格Size A1×B1-A2×B2	重量kg	序号 NO.	规格Size A1×B1-A2×B2	重量kg
		L1	L2			
1	50×5-100×50	4.82	24	150×75-800×200	29.39	
2	50×25-150×75	5.31	25	200×100-250×125	7.01	
3	50×25-200×100	6.33	26	200×100-300×150	9.03	
4	50×25-250×125	7.19	27	200×100-400×200	14.19	
5	50×25-300×150	9.61	28	200×100-500×200	17.38	
6	50×25-400×200	14.54	29	200×100-600×200	20.93	
7	50×25-500×200	17.57	30	200×100-800×200	29.11	
8	50×25-600×200	21.15	31	250×125-300×150	8.89	
9	50×25-800×200	28.77	32	250×125-400×200	13.70	
1						

产品介绍


PRODUCT INTRODUCTION

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3G下角垂直等径三通
XQJ-C-3G Downward corner vertical equal sectional Tee

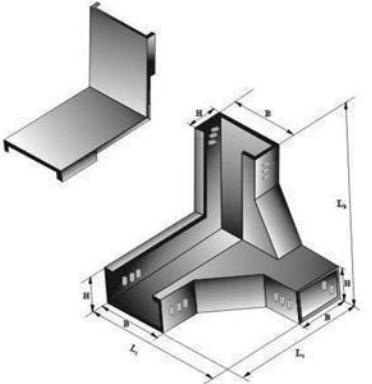

XQJ-C-3B上垂直等径三通
XQJ-C-3B Vertical equal sectional Tee

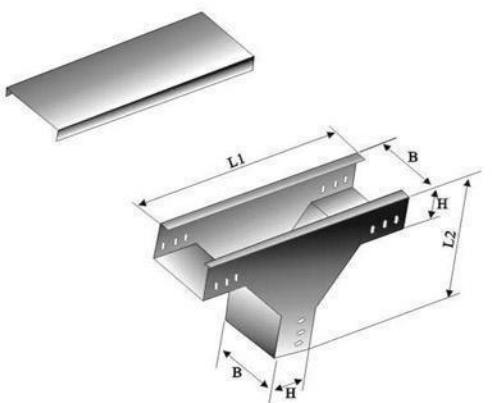

XQJ-C-3C上垂直等径三通
XQJ-C-3C Downward vertical equal sectional Tee

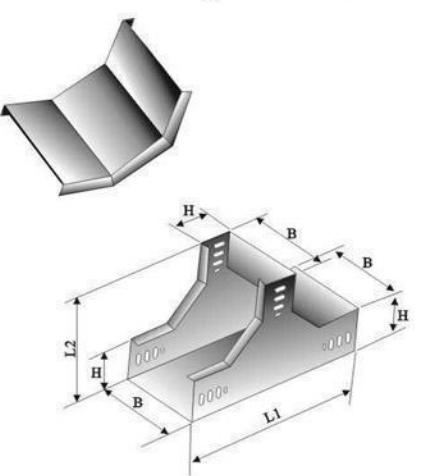

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-3G-1	50×25	150	125	2.18
2	C-3G-2	100×50	300	250	4.38
3	C-3G-3	150×75	350	275	11.49
4	C-3G-4	200×100	450	350	14.38
5	C-3G-5	250×125	500	370	15.76
6	C-3G-6	300×100	600	400	25.59
7	C-3G-7	300×150	650	500	32.90
8	C-3G-8	400×100	700	400	37.69
9	C-3G-9	400×150	750	500	42.36
10	C-3G-10	400×200	800	600	52.05
11	C-3G-11	500×100	800	400	54.54
12	C-3G-12	500×150	850	500	56.28
13	C-3G-13	500×200	900	600	62.16
14	C-3G-14	600×100	900	400	65.59
15	C-3G-15	600×150	950	500	67.38
16	C-3G-16	600×200	1000	600	72.04
17	C-3G-17	800×100	1000	400	85.12
18	C-3G-18	800×150	1150	500	87.78
19	C-3G-19	800×200	1200	600	93.46

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-3B-1	50×25	225	125	2.03
2	C-3B-2	100×50	450	250	3.46
3	C-3B-3	150×75	475	275	11.47
4	C-3B-4	200×100	600	350	13.34
5	C-3B-5	250×125	625	375	16.12
6	C-3B-6	300×100	700	400	23.86
7	C-3B-7	300×150	850	500	27.12
8	C-3B-8	400×100	800	450	29.48
9	C-3B-9	400×150	850	500	31.61
10	C-3B-10	400×200	1000	600	37.22
11	C-3B-11	500×100	900	500	50.21
12	C-3B-12	500×150	950	550	52.80
13	C-3B-13	500×200	1000	600	53.41
14	C-3B-14	600×100	900	500	55.68
15	C-3B-15	600×150	950	550	58.70
16	C-3B-16	600×200	1000	600	60.04
17	C-3B-17	800×100	900	500	63.28
18	C-3B-18	800×150	950	550	67.86
19	C-3B-19	800×200	1000	600	72.40


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

序号NO.	型号Model	规格 Size	(mm)		重量 Weight
			L ₁	L ₂	
1	C-3C-1	50×25	225	125	2.04
2	C-3C-2	100×50	450	250	3.96
3	C-3C-3	150×75	475	275	10.85
4	C-3C-4	200×100	600	350	13.34
5	C-3C-5	250×125	625	375	16.26
6	C-3C-6	300×100	700	400	23.81
7	C-3C-7	300×150	850	500	29.96
8	C-3C-8	400×100	800	450	30.24
9	C-3C-9	400×150	850	500	35.42
10	C-3C-10	400×200	1000	600	46.54
11	C-3C-11	500×100	900	500	49.37
12	C-3C-12	500×150	950	550	50.18
13	C-3C-13	500×200	1000	600	52.61
14	C-3C-14	600×100	900	500	53.84
15	C-3C-15	600×150	950	550	55.45
16	C-3C-16	600×200	1000	600	58.78
17	C-3C-17	800×100	900	500	66.28
18	C-3C-18	800×150	950	550	68.90
19	C-3C-19	800×200	1000	600	71.24

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2B垂直等径上弯通
XQJ-C-2B Vertical equal sectional upward bend

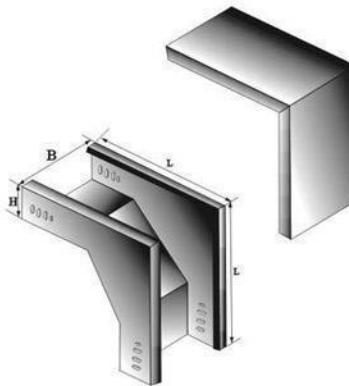

序号NO.	型号Model	规格 Size	L(mm)	重量Weight
1	C-2B-1	50×25	125	1.46
2	C-2B-2	100×50	250	3.82
3	C-2B-3	150×75	275	7.63
4	C-2B-4	200×100	350	9.62
5	C-2B-5	250×125	375	12.44
6	C-2B-6	300×100	400	18.86
7	C-2B-7	300×150	500	21.86
8	C-2B-8	400×100	400	23.89
9	C-2B-9	400×150	500	27.43
10	C-2B-10	400×200	600	32.15
11	C-2B-11	500×100	500	32.86
12	C-2B-12	500×150	600	32.62
13	C-2B-13	500×200	600	34.19
14	C-2B-14	600×100	600	41.86
15	C-2B-15	600×150	600	44.61
16	C-2B-16	600×200	600	46.90
17	C-2B-17	800×100	600	51.26
18	C-2B-18	800×150	600	53.86
19	C-2B-19	800×200	600	56.63

说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ-C-2D垂直等径左下弯通
XQJ-C-2D Vertical equal sectional left downward bend

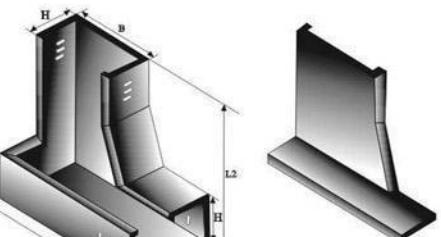


序号NO.	型号Model	规格 Size	(mm)		重量Weight
			L ₁	L ₂	
1	C-2D-1	50×25	150	125	1.37
2	C-2D-2	100×50	300	250	3.98
3</					

产品介绍


PRODUCT INTRODUCTION

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-3D上边垂直等径三通
XQJ-C-3D Upward side vertical equal sectional Tee



XQJ-C-3E下边垂直等径三通
XQJ-C-3E Downward side vertical equal sectional Tee

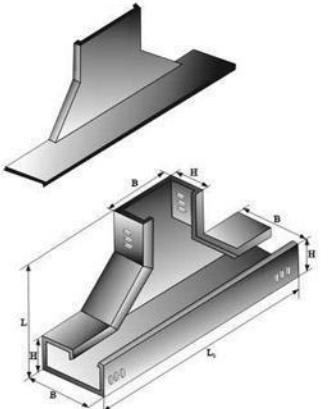

XQJ-C-3F上角垂直等径三通
XQJ-C-3F Upward corner vertical equal sectional Tee

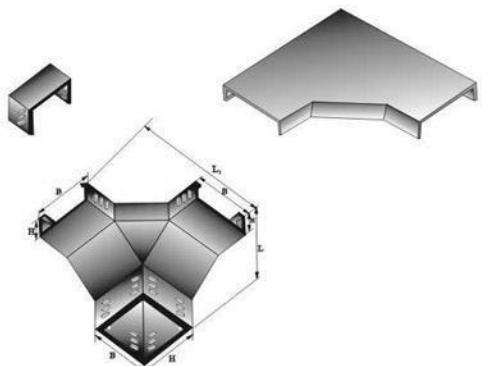

序号NO.	型号Model	规格 Size	L (mm)		重量 Weight
			L ₁	L ₂	
1	C-3D-1	50×25	250	125	2.21
2	C-3D-2	100×50	500	250	3.94
3	C-3D-3	150×75	550	275	11.96
4	C-3D-4	200×100	700	350	14.92
5	C-3D-5	250×125	750	375	18.30
6	C-3D-6	300×100	700	400	37.20
7	C-3D-7	300×150	1000	500	32.07
8	C-3D-8	400×100	800	450	42.80
9	C-3D-9	400×150	850	500	47.50
10	C-3D-10	400×200	1200	600	54.45
11	C-3D-11	500×100	900	500	61.30
12	C-3D-12	500×150	950	550	63.80
13	C-3D-13	500×200	1300	600	65.82
14	C-3D-14	600×100	900	500	72.10
15	C-3D-15	600×150	950	550	75.40
16	C-3D-16	600×200	1400	600	78.12
17	C-3D-17	800×100	900	500	87.50
18	C-3D-18	800×150	950	550	91.02
19	C-3D-19	800×200	1600	600	105.56


序号NO.	型号Model	规格 Size	L (mm)		重量 Weight
			L ₁	L ₂	
1	C-3E-1	50×25	250	125	2.23
2	C-3E-2	100×50	500	250	3.99
3	C-3E-3	150×75	550	275	11.97
4	C-3E-4	200×100	700	350	14.92
5	C-3E-5	250×125	750	375	19.02
6	C-3E-6	300×100	700	400	26.30
7	C-3E-7	300×150	1000	500	32.07
8	C-3E-8	400×100	800	450	38.20
9	C-3E-9	400×150	850	500	46.50
10	C-3E-10	400×200	1200	600	54.45
11	C-3E-11	500×100	900	500	63.40
12	C-3E-12	500×150	950	550	64.50
13	C-3E-13	500×200	1300	600	65.72
14	C-3E-14	600×100	900	500	72.80
15	C-3E-15	600×150	950	550	75.40
16	C-3E-16	600×200	1400	600	78.12
17	C-3E-17	800×100	900	500	86.30
18	C-3E-18	800×150	950	550	98.20
19	C-3E-19	800×200	1600	600	104.56

序号NO.	型号Model	规格 Size	L (mm)		重量 Weight
			L ₁	L ₂	
1	C-3F-1	50×25	150	125	1.90
2	C-3F-2	100×50	300	250	4.23
3	C-3F-3	150×75	350	275	10.98
4	C-3F-4	200×100	450	350	14.09
5	C-3F-5	250×125	500	370	17.39
6	C-3F-6	300×100	600	400	27.56
7	C-3F-7	300×150	650	500	32.59
8	C-3F-8	400×100	700	400	40.23
9	C-3F-9	400×150	750	500	45.18
10	C-3F-10	400×200	800	600	54.52
11	C-3F-11	500×100	800	400	56.59
12	C-3F-12	500×150	850	500	62.15
13	C-3F-13	500×200	900	600	64.68
14	C-3F-14	600×100	900	400	69.87
15	C-3F-15	600×150	950	500	72.36
16	C-3F-16	600×200	1000	600	78.79
17	C-3F-17	800×100	1100	400	86.18
18	C-3F-18	800×150	1150	500	95.25
19	C-3F-19	800×200	1200	600	103.82


说明：高度h=60, 100为单排连接孔，高h=150为双排连接孔
Description:h=60,single-row connection holes;h=150,double-row connection holes

XQJ槽式电缆桥架 XQJ Channel-type Support


XQJ-C-2E垂直等径右下弯通
XQJ-C-2E Vertical equal sectional right downward bend

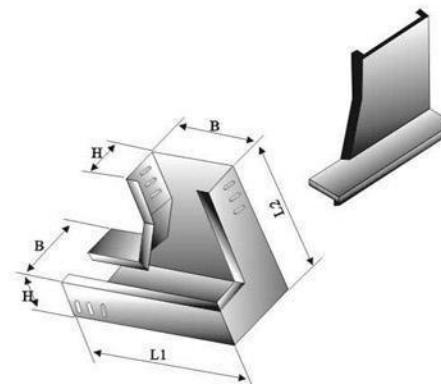

XQJ-C-2F垂直等径左上弯通
XQJ-C-2F Vertical equal sectional left upward bend

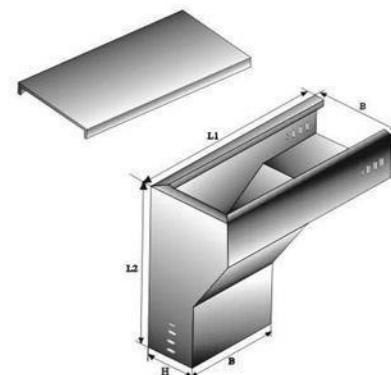

XQJ-C-2G垂直等径右上弯通
XQJ-C-2G Vertical equal sectional right upward bend

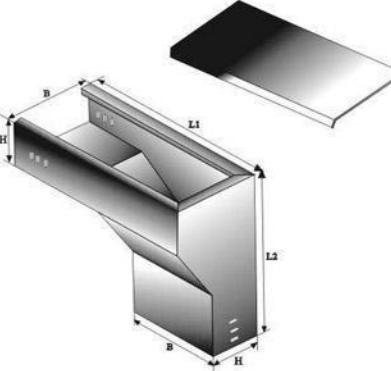

序号NO.	型号Model	规格 Size	L (mm)		重量 Weight
			L ₁	L ₂	
1	C-2E-1	50×25	150	125	1.47
2	C-2E-2	100×50	300	250	3.98
3	C-2E-3	150×75	350	275	7.85
4	C-2E-4	200×100	450	350	10.43
5	C-2E-5	250×125	500	375	14.22
6	C-2E-6	300×100	600	400	21.68
7	C-2E-7	300×150	650	500	24.45
8	C-2E-8	400×100	700	400	27.89
9	C-2E-9	400×150	750	500	35.56
10	C-2E-10	400×200	800	600	40.89
11	C-2E-11	500×100	800	400	41.88
12	C-2E-12	500×150	850	500	43.12
13	C-2E-13	500×200	900	600	49.94
14	C-2E-14	600×100	900	400	50.24
15	C-2E-15	600×150	950	500	52.13
16	C-2E-16	600×200	1000	600	61.14
17	C-2E-17	800×100	1100	400	65.45
18	C-2E-18	800×150	1150	500	76.89
19	C-2E-19	800×200	1200	600	84.17

序号NO.	型号Model	规格 Size	L (mm)		重量 Weight


产品介绍

PRODUCT INTRODUCTION


XQJ梯级式电缆桥架 XQJ Ladder-type support

梯级式桥架是根据国外有关技术及我厂产品的特点改进而成,它具有重量轻、成本低、造型别致、通风散热性能好等特点。它适用于一般直径较大的电缆敷设,特别适用于高、低压动力电缆的敷设。
Ladder-type cable support systems are products manufactured at this factory by referring to relevant technical data of other countries and maintaining the characteristics of the original products of this factory, it features small weight, low cost, unique shaping, fine permeability and quick heat dissipation. It is applicable for laying of big-diameter cables, especially high-voltage, low-voltage and power cables.


XQJ-T-01梯级直通
XQJ-T-01 Ladder-type straight Cable support

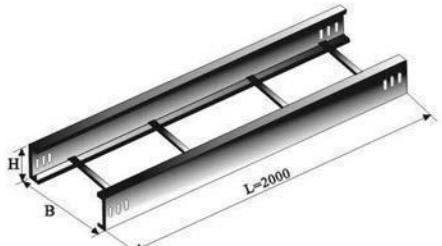

XQJ-T-02水平弯通
XQJ-T-02 Ladder-type horizontal bend

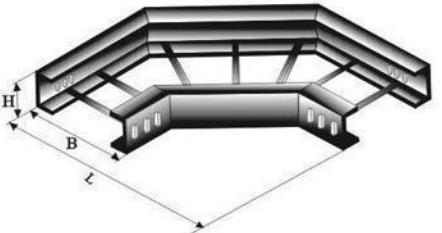

XQJ-T-03水平三通
XQJ-T-03 Ladder-type horizontal Tee

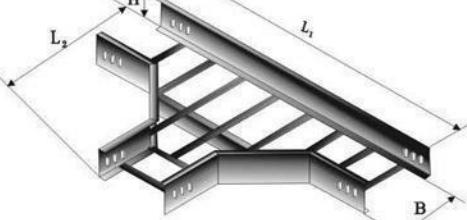


序号 NO.	型号 Model	b(mm)	h (mm)	重量(kg) Weight
1	T-01-6-2	200	60	10.66
2	T-01-10-2		100	17.76
3	T-01-15-2		150	23.95
4	T-01-6-3	300	60	13.35
5	T-01-10-3		100	20.06
6	T-01-15-3		150	25.23
7	T-01-6-4		60	19.10
8	T-01-10-4		100	25.56
9	T-01-15-4		150	31.95
10	T-01-20-4	400	200	35.34
11	T-01-6-5		60	20.65
12	T-01-10-5		100	27.21
13	T-01-15-5		150	33.31
14	T-01-20-5		200	41.55
15	T-01-6-6		60	22.24
16	T-01-10-6		100	28.21
17	T-01-15-6		150	35.15
18	T-01-20-6	600	200	43.16
19	T-01-6-8		60	31.11
20	T-01-10-8		100	38.69
21	T-01-15-8		150	46.05
22	T-01-20-8	800	200	53.56

序号 NO.	型号 Model	b(mm)	h (mm)	L(mm)	重量(kg) Weight
1	T-02-6-2	200	60	500	4.98
2	T-02-10-2		100		6.10
3	T-02-15-2		150		10.56
4	T-02-6-3	300	60	600	6.15
5	T-02-10-3		100		7.46
6	T-02-15-3		150		12.65
7	T-02-6-4		60	700	10.66
8	T-02-10-4		100		12.35
9	T-02-15-4		150		15.91
10	T-02-20-4		200	800	21.30
11	T-02-6-5		60		12.68
12	T-02-10-5		100		13.46
13	T-02-15-5		150		18.31
14	T-02-20-5		200	900	24.87
15	T-02-6-6		60		14.68
16	T-02-10-6		100		16.77
17	T-02-15-6		150		20.70
18	T-02-20-6		200		27.53
19	T-02-6-8		60	1100	18.96
20	T-02-10-8		100		21.13
21	T-02-15-8		150		26.34
22	T-02-20-8	600	200	1200	34.87


序号 NO.	型号 Model	b(mm)	h (mm)	L ₁ (mm)	L ₂ (mm)	重量(kg) Weight
1	T-03-6-2	200	60	800	500	7.26
2	T-03-10-2		100			9.02
3	T-03-15-2		150	1000		16.28
4	T-03-6-3	300	60	900	600	9.24
5	T-03-10-3		100			10.45
6	T-03-15-3		150	1000		17.92
7	T-03-6-4		60	1100	700	14.85
8	T-03-10-4		100			16.02
9	T-03-15-4		150			21.73
10	T-03-20-4		200	1200	800	29.05
11	T-03-6-5		60	1100		17.09
12	T-03-10-5		100			19.08
13	T-03-15-5		150			24.48
14	T-03-20-5		200	1300	900	32.76
15	T-03-6-6		60			19.23
16	T-03-10-6		100			21.86
17	T-03-15-6		150			27.23
18	T-03-20-6		200	1400	1000	36.60
19	T-03-6-8		60			22.44
20	T-03-10-8		100			25.77
21	T-03-15-8		150			32.71
22	T-03-20-8	600	200	1600	1200	42.08

XQJ梯级式电缆桥架 XQJ Ladder-type support


XQJ-T-04水平四通
XQJ-T-04Ladder-type horizontal Cross

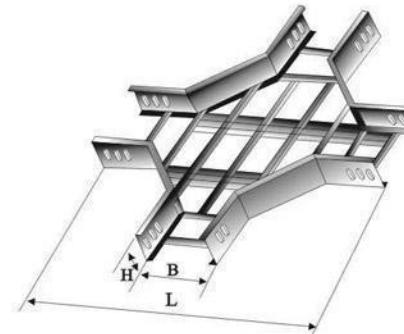

XQJ-T-05A垂直凹弯通
XQJ-T-05ALadder type straight concave bend

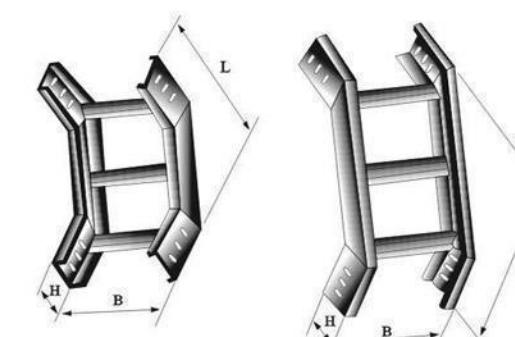

XQJ-T1-05C型垂直转动弯通
XQJ-T1-05CVertical rotatable bend

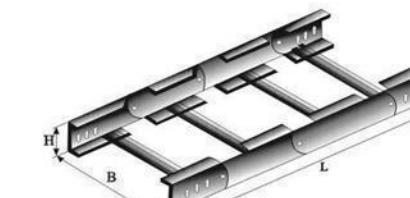

序号 NO.	型号 Model	b(mm)	h (mm)	L(mm)	重量(kg) Weight
1	T-04-6-2	200	60	800	9.52
2	T-04-10-2		100		11.43
3	T-04-15-2		150	1000	20.20
4	T-04-6-3	300	60	900	14.52
5	T-04-10-3		100		16.05
6	T-04-15-3		150	1100	21.80
7	T-04-6-4		60	1000	21.73
8	T-04-10-4	400	100		23.96
9	T-04-15-4		150	1200	27.42
10	T-04-20-4		200		37.04
11	T-04-6-5		60	1100	24.55
12	T-04-10-5		100		26.83
13	T-04-15-5	500	150	1300	30.96
14	T-04-20-5		200		38.65
15	T-04-6-6		60	1200	28.09
16	T-04-10-6		100		30.36
17	T-04-15-6	600	150		34.50
18	T-04-20-6		200	1400	42.50
19	T-04-6-8		60		35.16
20	T-04-10-8		100		37.43
21	T-04-15-8	800	150	1600	41.53
22	T-04-20-8		200		49.86

序号 NO.	型号 Model	b(mm)	h (mm)	L(mm)	重量(kg) Weight
1	T-05A-B-2	200	60	360	3.60
2	T-05A-B-10-2		100	400	4.71
3	T-05A-B-15-2		150	550	9.24
4	T-05A-B-6-3	300	60	360	4.38
5	T-05A-B-10-3		100	400	5.29
6	T-05A-B-15-3		150	550	10.30
7	T-05A-B-6-4		60	360	6.81
8	T-05A-B-10-4	400	100	400	8.15
9	T-05A-B-15-4		150	550	12.39
10	T-05A-B-20-4		200	700	

产品介绍

PRODUCT INTRODUCTION


立柱
Column

XQJ-H-01A 工字钢立柱
H-girder Column Model XQJ-H-01A




II型加重1.01kg/件
For Model II, the weight of each is added by 1.01kg

XQJ-H-01B 丁字钢立柱
T-iron Column Model XQJ-H-01B



II型加重1.01kg/件
For Model II, the weight of each is added by 1.01kg

XQJ-H-01C 槽钢立柱
E-channel Column Model XQJ-H-01C



II型加重1.01kg/件
For Model II, the weight of each is added by 1.01kg

XQJ-H-01D 角钢立柱
Angel Iron Column Model XQJ-H-01D



II型加重1.01kg/件
For Model II, the weight of each is added by 1.01kg

XQJ-H-01E 异型立柱
Special-shaped Steel Column Model XQJ-H-01E



II型加重1.01kg/件
For Model II, the weight of each is added by 1.01kg

XQJ-ZJ1 型支架
Support Model XQJ-ZJ1




型号 Model	b(mm)	a(mm)	c(mm)	e(mm)	重量 Weight
ZJ1-2	250				4.04
ZJ1-3	350				4.58
ZJ1-4	450				5.12
ZJ1-5	550				5.98
ZJ1-6	650				9.89
ZJ1-10	1050				13.16
ZJ1-12	1250				14.79

XQJ-ZJ2 型支架
Support Model XQJ-ZJ2



型号 Model	b(mm)	a(mm)	c(mm)	重量 Weight
ZJ2-2	250			2.38
ZJ2-3	350			3.31
ZJ2-4	450			4.25
ZJ2-5	550			5.21
ZJ2-6	650			6.16
ZJ2-10	1050			9.94
ZJ2-12	1250			11.84

XQJ-ZJ3 型支架
Support Model XQJ-ZJ3



型号 Model	b(mm)	a(mm)	h(mm)	e(mm)	重量 Weight
ZJ3-1	150	250		40×4	2.38
ZJ3-2	250	350			2.73
ZJ3-3	350	460			4.13
ZJ3-4	450	560			4.66
ZJ3-5	550	660			5.17
ZJ3-6	650	760			5.71
ZJ3-10	1050	1170			11.40
ZJ3-12	1250	1370			11.84

托臂 Bracket

产品外形 Shape	型号 Model	L	重量kg Weight	安装图例 Schematic diagram
XQJ-TB-01A型托臂 Bracket Model XQJ-TB-01A	TB-01A-10	125	0.98	
	TB-01A-15	175	1.35	
	TB-01A-20	225	1.76	
	TB-01A-25	275	2.04	
	TN-01A-30	325	2.34	
	TB-01A-40	425	3.52	
	TB-01A-50	525	4.12	
	TB-01A-60	625	4.70	
	TB-01A-80	825	6.24	
	TB-01A-100	1025	7.36	
	TB-01B-10	125	0.91	
	TB-01B-15	175	1.33	
	TB-01B-20	225	1.74	
	TB-01B-25	275	1.98	
	TN-01B-30	325	2.32	
	TB-01B-40	425	2.92	
	TB-01B-50	525	3.51	
	TB-01B-60	625	4.11	
	TB-01B-80	825	5.29	
	TB-01B-100	1025	7.95	
XQJ-TB-02A型托臂 Bracket Model XQJ-TB-02A	TB-02-10	125	0.96	
	TB-02-15	175	1.19	
	TB-02-20	225	1.60	
	TB-02-25	275	1.95	
	TN-02-30	325	2.18	
	TB-02-40	425	2.78	
	TB-02-50	525	3.36	
	TB-02-60	625	3.98	
	TB-02-80	825	5.15	
	TB-02-100	1025	7.92	
XQJ-TB-03A型托臂 Bracket Model XQJ-TB-03A	TB-03A-10	125	0.92	
	TB-03A-15	175	1.17	
	TB-03A-20	225	1.56	
	TB-03A-25	275	1.89	
	TN-03A-30	325	2.12	
	TB-03A-40	425	2.32	
	TB-03A-50	525	2.72	
	TB-03A-60	625	3.95	
	TB-03A-80	825	5.12	
	TB-03A-100	1025	7.79	
XQJ-TB-03B型托臂 Bracket Model XQJ-TB-03B	TB-03B-10	125	0.79	
	TB-03B-15	175	0.94	
	TB-03B-20	225	1.26	
	TB-03B-25	275	1.38	
	TB-03B-30	325	1.57	
	TB-03B-40	425	1.78	
	TB-03B-50	525	1.96	
	TB-03B-60	625	2.84	
	TB-03B-80	825	4.16	
	TB-03B-100	1025	6.38	
XQJ-TB-04型托臂 Bracket Model XQJ-TB-04	TB-04-15	150	0.94	
	TB-04-20	200	1.26	
	TB-04-30	300	1.57	
	TB-04-35	350	1.71	
	TN-04-40	400	1.88	
	TB-04-50	500	2.20	
	TB-04-55	550	2.36	
	TB-04-60	600	2.51	
	TB-04-70	700	2.83	
	TB-04-80	800	3.14	



产品介绍


PRODUCT INTRODUCTION

连接附件 Connection Accessories

产品外形 Shape	型号 Model	侧边高H(mm) Side Height	H ₁ (mm)	B ₁ (mm)	安装图例 Schematic diagram																														
XQJ-TPC-01A 调宽片 Width adjusting piece XQJ-TPC-01A	TPC-01A-100	75	100																																
	TPC-01A-150		150																																
	TPC-01A-200		200																																
	TPC-01A-300		300																																
	TPC-01A-400		400																																
	TPC-01A-500		500																																
	TPC-01A-600		600																																
XQJ-TPC-01B 调高片 Height adjusting piece XQJ-TPC-01B	TPC-01B-75/100	50	75	182	0.47																														
	TPC-01B-75/150	50	125	282	0.68																														
	TPC-01B-75/200	50	175		1.10																														
	TPC-01B-100/150	75	125		0.68																														
	TPC-01B-100/200	75	175		1.10																														
	TPC-01B-150/200	125	175		1.10																														
	TPC-01B-200	200	175																																
XQJ-TPC-02 直接片 Straight Connection piece XQJ-TPC-02	TPC-02-50	50、60	L Side Height	35	0.47																														
	TPC-02-75	75		50	0.78																														
	TPC-02-100	100		75	1.10																														
	TPC-02-125	125		100	1.42																														
	TPC-02-150	150		125	2.17																														
	TPC-02-200	200		175	3.68																														
	DJ-TPC-02B100、150、200型 DJ-TPC-02B100、150、200Type																																		
XQJ-TPC-03 弯接片 Bend Connection piece XQJ-TPC-03	TPC-03-50	25	100	150	0.33																														
	TPC-03-75	50	120	200	0.62																														
	TPC-03-100	75		90	0.93																														
	TPC-03-150	125		300	2.75																														
	TPC-03-200	175		120	5.5																														
	配套大跨距电缆桥架直接片																																		
	Bend connection piece Cable Support Connection bolt																																		
XQJ-TPC-04 调角片 Angle adjusting piece XQJ-TPC-04	TPC-04-75	75	50	166	0.52																														
	TPC-04-100	100	75	191	1.15																														
	TPC-04-150	150	125	341	2.12																														
	TPC-04-200	200	175	391	4.40																														
	调角片 Angle adjusting piece 连接螺栓 Connection bolt 电缆桥架 Cable Support																																		
	TPC-05固定压板，主要用于梯级式桥架与托臂压固及梯级式桥架垂直安装时与墙壁固定 Modek TPC-05 fixed holdown plate																																		
	TPC-05 Fixed holdown plate																																		
XQJ-TPC-07 隔板 XQJ-TPC-07 Partition plate	10×20			梯级式桥架 Ladder Support																															
	托臂 bracket			连接螺栓 Connection bolt																															
	固定压板 Fixed holdown plate			托臂 bracket																															
	隔板 Compartment			连接螺栓 Connection bolt																															
	电 缆 桥 架 Cable Support			电 缆 桥 架 Cable Support																															
	隔板 Compartment			电 缆 桥 架 Cable Support																															
	连接螺栓 Connection bolt			连接螺栓 Connection bolt																															
<table border="1"> <thead> <tr> <th>型号 Model</th> <th>H₁ (mm)</th> <th>H₂ (mm)</th> <th>重量kg Weight</th> <th>h₁</th> <th>h₂</th> </tr> </thead> <tbody> <tr> <td>TPC-07-75</td> <td>40</td> <td>75</td> <td>4.18</td> <td></td> <td></td> </tr> <tr> <td>TPC-07-100</td> <td>75</td> <td>100</td> <td>4.18</td> <td>4.18</td> <td>6.84</td> </tr> <tr> <td>TPC-07-150</td> <td>120</td> <td>150</td> <td>7.85</td> <td>7.85</td> <td>9.37</td> </tr> <tr> <td>TPC-07-200</td> <td>170</td> <td>200</td> <td>12.97</td> <td>12.97</td> <td>14.87</td> </tr> </tbody> </table>						型号 Model	H ₁ (mm)	H ₂ (mm)	重量kg Weight	h ₁	h ₂	TPC-07-75	40	75	4.18			TPC-07-100	75	100	4.18	4.18	6.84	TPC-07-150	120	150	7.85	7.85	9.37	TPC-07-200	170	200	12.97	12.97	14.87
型号 Model	H ₁ (mm)	H ₂ (mm)	重量kg Weight	h ₁	h ₂																														
TPC-07-75	40	75	4.18																																
TPC-07-100	75	100	4.18	4.18	6.84																														
TPC-07-150	120	150	7.85	7.85	9.37																														
TPC-07-200	170	200	12.97	12.97	14.87																														
<table border="1"> <thead> <tr> <th>型号 Model</th> <th>G</th> <th>M</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>TPC-13-1/2"</td> <td>1/2"</td> <td>M22×1</td> <td>18</td> </tr> <tr> <td>TPC-13-3/4"</td> <td>3/4"</td> <td>M27×1.5</td> <td>22</td> </tr> <tr> <td>TPC-13-1"</td> <td>1"</td> <td>M33×1.5</td> <td>28</td> </tr> <tr> <td>TPC-13-11/2"</td> <td>11/2"</td> <td>M48×2</td> <td>38</td> </tr> <tr> <td>TPC-13-2"</td> <td>2"</td> <td>M56×2</td> <td>48</td> </tr> </tbody> </table>						型号 Model	G	M	d	TPC-13-1/2"	1/2"	M22×1	18	TPC-13-3/4"	3/4"	M27×1.5	22	TPC-13-1"	1"	M33×1.5	28	TPC-13-11/2"	11/2"	M48×2	38	TPC-13-2"	2"	M56×2	48						
型号 Model	G	M	d																																
TPC-13-1/2"	1/2"	M22×1	18																																
TPC-13-3/4"	3/4"	M27×1.5	22																																
TPC-13-1"	1"	M33×1.5	28																																
TPC-13-11/2"	11/2"	M48×2	38																																
TPC-13-2"	2"	M56×2	48																																

护罩 Cover

XQJ-TPC-08直通护罩
Straight Cover Model XQJ-TPC-08

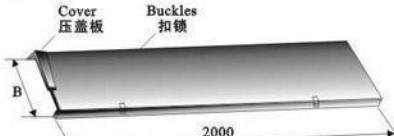

XQJ-TPC-09弯通护罩
Elbow Joint Cover Model XQJ-TPC-09




XQJ-TPC-10三通护罩
T-Joint Cover Model XQJ-TPC-10




XQJ-TPC-11四通护罩
Cross Cover Model XQJ-TPC-11



ZQC-ZH-03吊杆
ZQC-ZH-03 Suspending rod

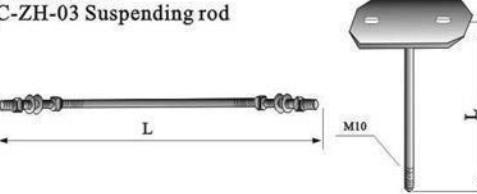

XQJ-C-01B桥架封头
XQJ-C-01B Support end piece



序号 NO.	型号 Model	宽度b Width	重量kg (件) Weight(piece)	备注 Remarks
1	TPC-08-1	100	4.48	
2	TPC-08-2	200	8.47	
3	TPC-08-3	300	17.06	
4	TPC-08-4	400	27.74	
5	TPC-08-5	500	34.06	
6	TPC-08-6	600	40.40	
7	TPC-08-8	800	63.53	

序号 NO.	型号 Model	宽度b Width	重量kg (件) Weight(piece)	备注 Remarks
1	TPC-09-2	200	2.58	
2	TPC-09-3	300	7.39	
3	TPC-09-4	400	14.15	
4	TPC-09-5	500	18.90	
5	TPC-09-6	600	24.24	
6	TPC-09-8	800	43.52	

序号 NO.	型号 Model	宽度b Width	重量kg (件) Weight(piece)	备注 Remarks
1	TPC-08-2	200	4.34	
2	TPC-08-3	300	12.22	
3	TPC-08-4	400	20.84	
4	TPC-08-5	500	30.68	
5	TPC-08-6	600	37.98	
6	TPC-08-8	800	65.20	

序号 NO.	型号 Model	宽度b Width	重量kg (件) Weight(piece)	备注 Remarks
1	TPC-08-2	200	5.71	
2	TPC-08-3	300	11.48	
3	TPC-08-4	400	31.35	
4	TPC-08-5	500	39.27	
5	TPC-08-6	600	47.90	
6	TPC-08-8	800	71.34	

序号 NO.	型号 Model	宽度b Width	重量kg (件) Weight(piece)	备注 Remarks
1	TPC-08-5	500	1.65	
2	TPC-08-8	800	1.97	
3	TPC-08-10	1000	2.14	
4	TPC-08-12	1200	2.45	
5	TPC-08-15			

车间展示

WORKSHOP DISPLAY



工程案例

ENGINEERING CASE



镀锌展示
GALVANIZED DISPLAY

